

# ROAD WORK - DEFLEX 48

## 48" FLEXIBLE ROADWORK DELINEATOR

(FOR NARROW WORK ZONES & CITY USE)

This high-performance Deflex flexible delineator for road work is a durable marker to set boundaries on work zone. This delineator is clearly visible day and night, and has been designed for the safety of the most vulnerable road users. Lightweight and resilient, the 48" Deflex delineator is made of a treated polymer blend to withstand harsh weather and vehicle impacts, it keeps its shape after as many as 200 impacts at 55 mph / 88 km/h. 48" is the best height for being visible by all road users. The road work - Deflex 48 is a great traffic calming tool for the benefit of work zone safety.



MADE OF FLEXIBLE  
POLYMER



EASY INSTALLATION ON  
MULTIPLE SURFACES



PERFECT FOR  
NARROW WORKZONES

# DEFLEX

## FLEXIBLE DELINEATOR





# FEATURES OF THE DEFLEX 48 ROAD WORK DELINEATOR



Scan me for video



Perfect for narrow workzones



Quick and easy to deploy



Stable: resists wind and truck drift.



High storage capacity  
100 units in a pick-up truck



High visibility, day and night



Long lasting, affordable and economical



Stability means less maintenance after collisions

HOW TO INSTALL

Slide a rubber base

Use mastic or epoxy for temporary use

OPTIONS

Flashing solar LED cap

#35739  
With signage

Use a drop of epoxy, shield and bolt

SPEED LIMIT	Roadwork & Lane divider	
	Straight lane	Curved lane
20 MPH 30 KM/H	15' (5 METERS)	10' (3 M)
25 MPH 40 KM/H	15' (5 M)	10' (3 M)
30 MPH 50 KM/H	30' (10 M)	15' (5 M)
35 MPH 60 KM/H	30' (10 M)	15' (5 M)
40 MPH 70 KM/H	30' (10 M)	15' (5 M)
50 MPH 80 KM/H	45' (15 M)	25' (8 M)
55 MPH 90 KM/H	45' (15 M)	25' (8 M)
60 MPH 100 KM/H	60' (20 M)	30' (10 M)

CENTER TO CENTER






# TECHNICAL SPECIFICATIONS OF THE DEFLEX 48 ROAD WORK DELINEATOR



Scan me for video

## Features

Materials	Delineator: Flexible Polymer with anti-UV Sheeting: Diamond grade "prismatic", type IV
Features	Proven product since 2012 in harsh weather conditions and in temperatures between -20 and +35°C (-4 and +95°F).
Performance	360° flexibility and visibility. The Deflex delineator withstands 200 impacts at 70 km/h (45 mph) and regains its original shape, even after being crushed by the wheels of heavy trucks.
Standard Certifications	NCHRP-350 MTQ T-RV-10 GUQ-1036
Composition	Molded-in and non-detachable flexible cap. Four (4) embedded stripe sections protected from damage. 3M prismatic grade (type IV) reflective sheeting, flexible and visible on 360°. Many colors available, pigment integrated into the polymer material. UV protected.

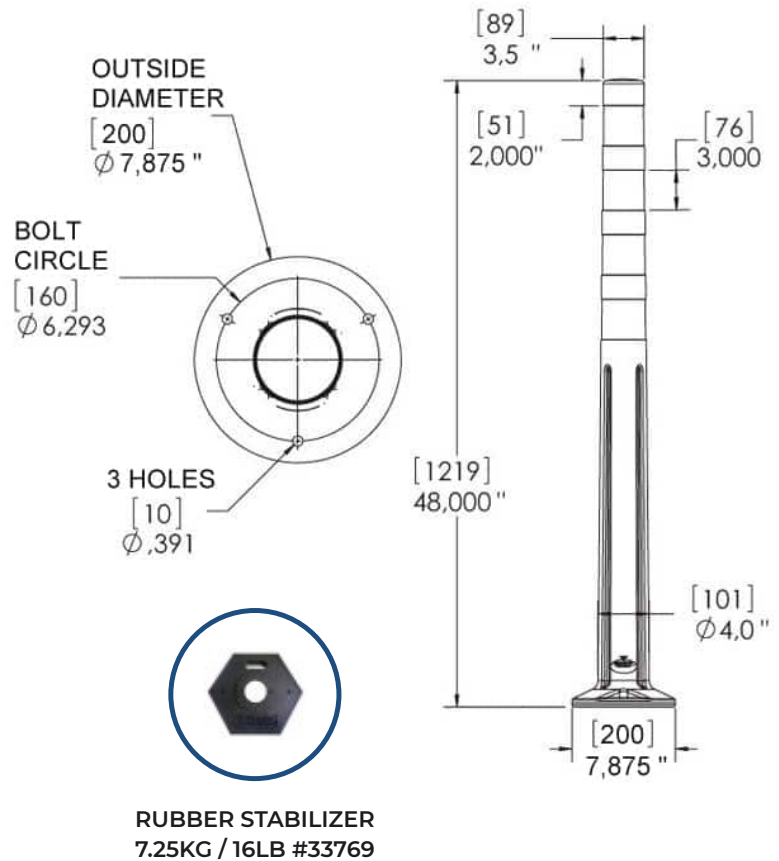

Product Number	Description	Box : Dimenson - Weight	HSS Code
<b>Assembly Kit</b>			
#30820	Orange Flexible delineator with four (4) White Diamond Grade Reflective Bands	Pallet 100 units : 44 x 50 x 80 in – 450 lbs	3926.90
#33391	Black Flexible delineator with four (4) Fluorescent Orange Diamond Grade Reflective Bands	Pallet 100 units : 44 x 50 x 80 in – 450 lbs	3926.90
<b>Options</b>			
#33769	Hexagonal rubber base	Pallet 50 units : 42 x 46 x 26 in – 1100 lbs	4017.00
#35199	Deflex ASPHALT Bolt-In Installation Kit	Box 50 units : 11 x 17 x 4 in – 33 lbs	N/A
#32410	Adhesive Mastic 8" square c/w bolts & transfer plate	Box 50 units : 11 x 17 x 8 in – 75 lbs	N/A

**Included with kit :** Two (2) year Limited Warranty against defects in workmanship and materials.