THIN-12C COMPACT RADAR SPEED FEEDBACK SIGN

(RESIDENTIAL-INDUSTRIAL & COMMERCIAL)

The THIN-12C is a speed feedback sign displaying the maximum speed and the vehicle speed on the same sign. It is as light and thin as a standard traffic sign (3.25 mm, 0.125" thick) which allows it to be installed on any signpost and thus save on installation costs. The radar also serves as a traffic analyzer and can classify four different types of vehicles by speed and period. A very effective traffic calming device for an industrial, residential and commercial environment.









FEATURES OF THE THIN-12C COMPACT RADAR SPEED FEEDBACK SIGN





Built-in control menu to quickly manage basic parameters and data collection.

Aluminium

Light and resistant. Installs like a standard traffic sign.

Reflective sheeting

High Intensity, Type III or Diamond grade, Type XI reflective sheeting.

Controller

integrated into the sign.

automatically. 12" Amber Digits

Adjusts brightness

Photocell

Powerfull LEDS integrated into the sign. Unique 7 12" digits heights for each number.

segments to get a real

Shield Protector

Offers Protection against inclement weather and vandalism.

Also limits light angularity.

Snap-in Connector

Small enough to be hidden inside pole. IP 67 protection.










Four Colors According to MUTCD standards and application.

SOLAR POWER UNIT (ALL-IN-ONE & PLUG-AND-PLAY)

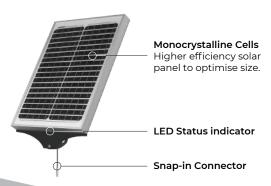

Lithium LifePo4 battery

Light and slim. 10 years life expectancies. Maintenance free

MPPT Charger

Increases charging efficiency by minimum 20% compared to PWM.

Universal mounting bracket

Top or side of pole installation. 360 degree swivel.



Stat Expert Software

Traffic analyser software included. Compatible with Windows 7 & 10. Record more than a million measurements. Five pre-built reports. Detect four types of vehicle categories. Bluetooth collection (optional).





TECHNICAL SPECIFICATIONS OF THIN-12C COMPACT RADAR SPEED FEEDBACK SIGN

13.75 in

Solar Power Unit (All-in-one)

Solar Panel 30 Watts Monocrystalline

LifePo4 Battery 12.8V - 13.5Ah Solar charger MPPT, 10 A, IP67

Connector 10mm OD, Female, 6 in, IP67 Operating temperature -40 to + 165°F (-40 to +74°C)

Weight 7.7 kg (17 lb)

Radar Driver Feedback Sign

Radar Doppler

Range Between 164' (50 m) and 1000' (300m)

Width 12°H x 24°V Data acquisition Bidirectional Precision +/- 1 Km/h

Wireless communication Bluetooth, 160' (50m) range

Display Size 13 x 20.5" (330 x 521mm)
Digit height 12" (305mm) - 202 LEDs

LED angularity 30 degrees
Color of LED Amber

Visibility More than 1000′ (300m)

Auto-dimming Variable based on ambient light

Voltage in 10,8 to 15 VDC

Max. power consumption 36 Watts

Strobe color (optional) White

Connector 10mm OD, Male, 6 in, IP67


Back Plate Aluminium 0,125" (3mm) 5052H38

Sign face (yellow or white)
Sign face (orange or green)
Type XI reflective sheeting
Type XI reflective sheeting

Shield Protection .188" (5mm) Polycarbonate (black)

Waterproof rating IP65

Operational temperature -40 to +149°F (-40 to +65° C)

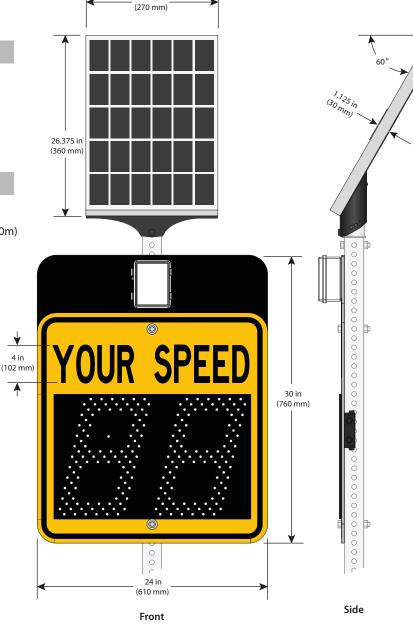

Product Number	Description	Box: Dimension - Weight	HSS Code
Assembly Kit			
# #37715	THIN-12C Compact Radar Speed Feedback Sign, 30W solar power unit - White background	32 x 32 x 8 in - 30 lb	8530.90
/ #37716	THIN-12C Compact Radar Speed Feedback Sign, 30W solar power unit - Yellow background	32 x 32 x 8 in - 30 lb	8530.90
/ #37717	THIN-12C Compact Radar Speed Feedback Sign, 30W solar power unit - Yellow/Green backgr.	32 x 32 x 8 in - 30 lb	8530.90
🥒 📅 #37718	THIN-12C Compact Radar Speed Feedback Sign, 30W solar power unit -	32 x 32 x 8 in - 30 lb	8530.90
Options	Orange background		
#38152	Strobe option for THIN-12/THIN-12C	Kit box (+ 2 lb)	N/A

Included in kit: Installation hardware for 2" Telespar post, 2-3/8" round pole, U-Post or streetlight pole. Two (2) years Limited Warranty against defects in workmanship and materials.