

THIN-8DFBS

8" THIN DUAL FLASHING BEACON SIGN (24x52)

The leading cause of roadway accidents in North America is distracted driving. The addition of dual flashing beacons will help prevent accidents in critical areas such as intersections, crosswalks and school zones by attracting attention to traffic signs. With high-intensity LED lights, the single flasher beacon catches the drivers' attention and ensures the visibility of signs, thus improving road safety.



REINFORCE THE SIGN
IN CRITICAL ZONES



SOLAR POWER
SUPPLY



INCREASE ROAD
USERS SAFETY

THIN

LED TRAFFIC SIGN





FEATURES OF THE 8" THIN DUAL FLASHING BEACON SIGN (24x52)



VERTICAL OR HORIZONTAL INSTALLATION

Amber LED
Yellow panel



#TD-CD20AJ

Amber or red LED
Black panel



#TD-CD20AN

TWO COLORS AVAILABLE



ADD A REFLECTIVE OR STANDARD
TRAFFIC SIGN



WIG-WAG MODE

OR



SYNC MODE

PREPROGRAMMED OR PROGRAMMABLE
FLASHING PATTERN



All-in-one Solar
Power Unit



120-240 VAC
Electric cabinet
with battery

POWER SUPPLY OPTIONS



NIGHT ONLY
(OPTION)



24 HOURS



WIRELESS REMOTE
CONTROL (OPTION)



WIRELESS PUSH
BUTTON (OPTION)



CUSTOM SCHEDULE
(OPTION)



EXTERNAL SENSOR
(OPTION)





TECHNICAL SPECIFICATIONS OF THE 8" THIN DUAL FLASHING BEACON SIGN (24x52)

Solar Power Unit (All-in-one)

Solar Panel	30 W Monocrystalline
Battery	12.8 V – 14 Ah – LifePo4
Solar Charger	MPPT, 10 A, IP67
Connector	10 mm OD, Male, 6 in, IP67
Operating Temperature	-40 to +74°C (-40 to +165°F)
Weight	7.7 kg (17 lb)

Dual Flashing Beacon Sign (24x52)

Beacon Lens	Two (2x) 200 mm (8 in) Amber or Red LEDs
Standard	ITE VTCSH-STD 2005
Auto-Brightness	Various Stages of Brightness for Day or Night (can be manually disabled)
Controller	Built-in
Controller Input Voltage	9.6 to 14 VDC
Connector	Snap-in, Overmolded IP67 Connector, 10 mm OD
Flash Patterns	MUTCD (0.5 sec ON, 0.5 sec OFF), Solar Power Mode or Rapid Flash
Beacon Control Operation	Wigwag or Simultaneous 24 hrs, Night Only or Optional Activation
Operational Temperature Default	-40 to +74°C (-40 to +165°F) 24 hrs – Wigwag – Solar Power Flashing Pattern Mode (0.2 sec ON)
Reflective Sheeting	3M High Intensity Prismatic D 4956-09 ASTM type IV
Sign Visors	3 mm (.125") Aluminum 5052-H38 Aluminum, Textured Black Powder Coated
Lens	UV Stabilized Clear PVC
Environmental Protection	IP67

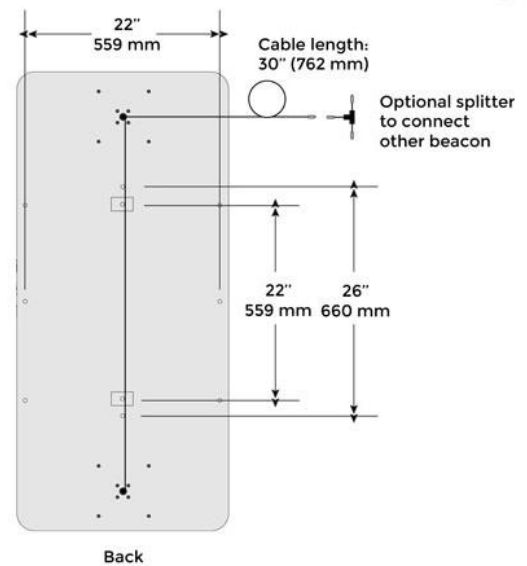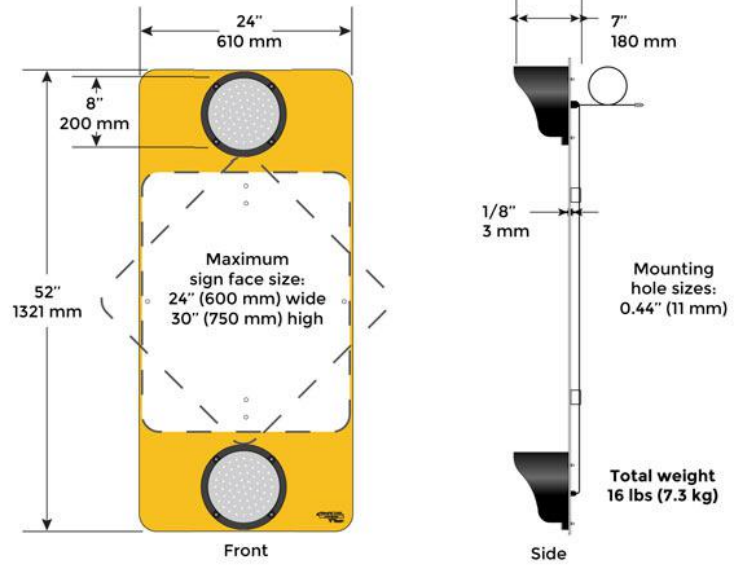

Product Number	Description	Box : Dimension - Weight	HSS Code
Assembly Kit			
#37754	Dual Flashing Beacon Sign, amber, black background, 30 W solar power unit	28 x 54 x 8 in – 52 lbs	8530.90
#38184	Dual Flashing Beacon Sign, amber, yellow background, 30 W solar power unit	28 x 54 x 8 in – 52 lbs	8530.90
# 37754	Dual Flashing Beacon Sign, red, black background, 30 W solar power unit	18 x 32 x 14 in – 32 lbs	8530.90
Activation Options			
#38129	Software Kit for Schedule, configuration and pairing (USB Dongle + Software)	Included in kit box	N/A
#36463	Wireless and battery free Remote Control	Included in kit box	N/A
#36287	Wireless and battery free Push Button	Included in kit box	N/A
#36267	Wireless and battery free Push Button on a Flexible Post	8 x 8 x 40 in - 8 lb	8530.80
#36900	Vehicle Sensor Activation for 2-3/8" pole	Kit box (+ 2 lb)	N/A

Included in kit : Installation hardware for 2" Telespar post, 2-3/8" round pole, U-Post or streetlight pole.
Two (2) years Limited Warranty against defects in workmanship and materials.